


NMF-OA2S2-FN-SCU-SCU-BL-50

NIKOMAX optical fiber adapter, Single-mode 9/125 μ m, OS2, SC/UPC-SC/UPC, full flange, duplex, blue, 50pcs

Optical fiber adapters are designed for connecting patch cords and cables terminated with the same type of connector. Adapters are installed in removable panels in optical patch panels and provide a reliable connection, as well as stable parameters of detachable connection.

The SC adapter is made of plastic of different colors for better visual identification of the adapter type. Blue is used to connect the connectors with UPC polishing, and green ones - with APC polishing. Mounting of SC type adapters to removable panels in optical crossways is carried out using metal latches and screws.

Centering bushings are made of ceramic for all optical connecting adapters intended for single-mode fiber. All adapters are equipped with plugs for protection against dirt and dust.

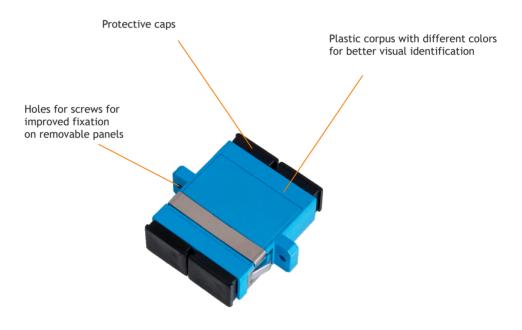

NMF-OA2S2-FN-SCU-SCU-BL-50

Package Content

Optical fiber adapter 50 pcs

The manufacturer reserves the right to change the appearance and characteristics of the product, without reducing its consumer properties

NIKOMAX Optical Fiber Adapters



Specification

PN	NMF-OA2S2-FN-SCU-BL-50				
Fiber type	Single Mode 9/125 OS2				
Adapter type	SC				
Polishing	UPC				
Execution	Duplex				
Corpus material	Plastic				
Color	Blue				
Central bushing material	Ceramics				
Insertion loss, dB	≤0,2				
Return loss, dB	≥50				
Number of switching cycles	No less than 1000				
Temperature ranges	Laying -40 to +85 ° C. Operation -40 to +85 ° C				
Individual packing	Plastic bag				
Warranty	1 year				

Ordering Table

PN	Execution	Adapter type / Polishing	Fiber type	Individual packing	
				Volume, m3	Weight, kg
NMF-OA2S2-FN-SCU-SCU-BL-50	Duplex	SC/UPC - SC/UPC	SM OS2		

The manufacturer reserves the right to change the appearance and characteristics of the product, without reducing its consumer properties