

NMF-SC-3H-120-8MS

NIKOMAX Splice Closure, 120 fibers, 8 I/O,
with mechanical sealing of the inputs, with a
kit for fasteners, outdoor design

- ✓ To seal the cable inlets do not require an open fire or a hair dryer.
- ✓ Simplicity and speed of installation and fixation of fibers, as well as repeated access to the coupling, which does not require additional tools

Optical splice closure NMF-SC-3H-120-8MS intended for the protection of places of welding of the optical cable in places increased stress and possible external influences, as well as branching the subscriber line connection from the main (backbone) communication line. The splice closure can be placed on the walls of buildings, in the ventilation system, as well as on the support of aerial fiber-optic communication lines. Ideal for use in cable sewer wells and laying into the ground.

The mounting system allows you to securely fasten the coupling at the place of its installation. Assembly of the splice closure is quite simple and does not take much time. All elements and accessories, as well as special tools, make the assembly reliable, high-quality and fast.

The housing of the splice closure, made of impact-resistant frost-resistant polycarbonate, provides long-term and reliable protection of intergrowths. A sealing gasket made of a specially developed material and a sealing tape prevent moisture and dust from entering for a long time.



The manufacturer reserves the right to change the appearance and characteristics of the product, without reducing its consumer properties

Package Content:

Housing	1 pcs
Port plug	8 pcs
Seal fitting	1 pcs
Splice tray	5 pcs
Frame for fixing	1 pcs
Earthing deriving device	1 set
Accessories	1 set
Instruction manual	1 pcs
Tools set	1 set
Locking inserts	4 pcs


SPECIFICATION

Part Number	NMF-SC-3H-120-8MS
Outside dimension	420 x 200 x 105 mm
Weight	2.0 kg
Capacity, max	120
Number of inlet/outlet ports	8 round inputs
Diameter of fiber cable	4 x 14 mm / 4 x 20 mm
Temperature ranges	- 50 C to + 70 C
Individual packing	Carton Box

ORDERING TABLE

Part Number	Number of cable entries	Max. Cable diameter	Volume, m3	Weight, kg
NMFSC-3H-120-8MS	8 round inputs	4 x 14 mm / 4 x 20 mm		

DRAWING

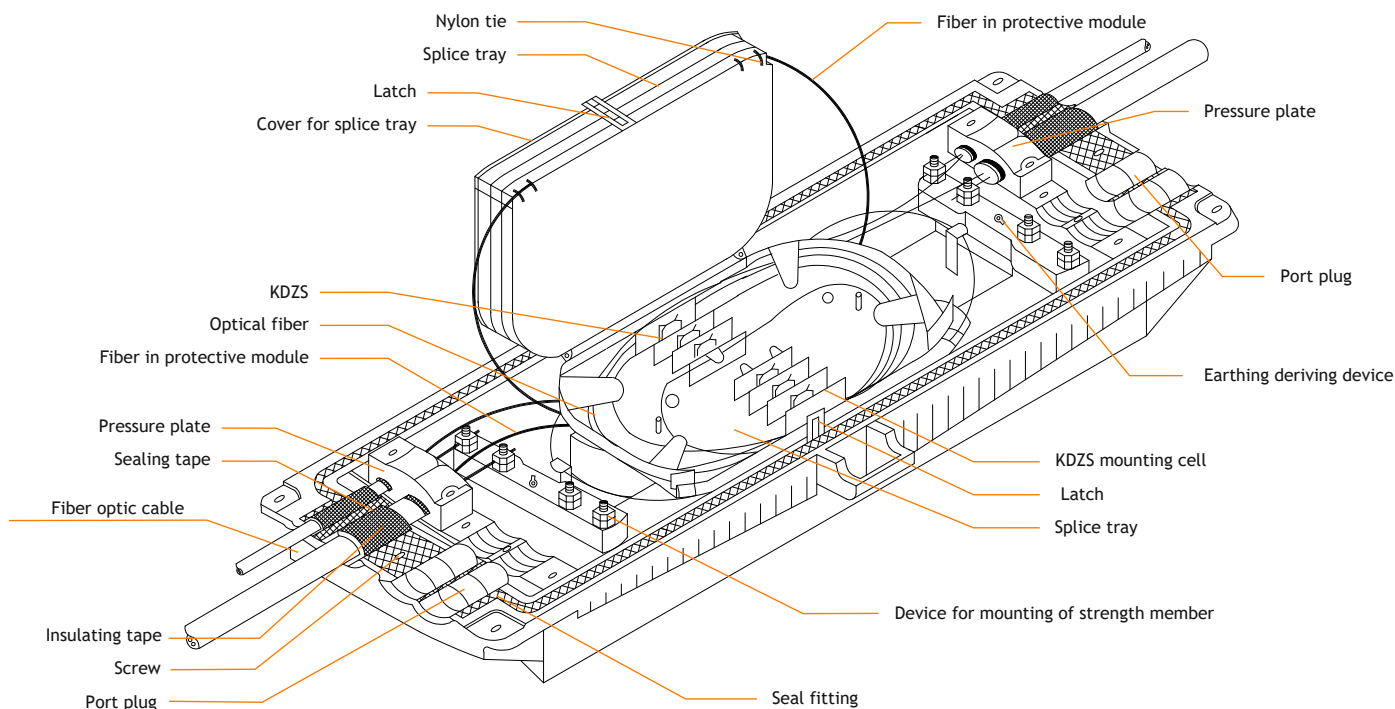

The manufacturer reserves the right to change the appearance and characteristics of the product, without reducing its consumer properties