


NMF-OA1S2-FN-SCA-SCA-GN-100

NIKOMAX optical fiber adapter, Single-mode 9/125µm, OS2, SC/APC-SC/APC,full flange, simplex, green, 100pcs

Optical fiber adapters are designed for connecting patch cords and cables terminated with the same type of connector. Adapters are installed in removable panels in optical patch panels and provide a reliable connection, as well as stable parameters of detachable connection.

The SC adapter is made of plastic of different colors for better visual identification of the adapter type. Blue is used to connect the connectors with UPC polishing, and green ones - with APC polishing. Mounting of SC type adapters to removable panels in optical crossways is carried out using metal latches and screws.

Centering bushings are made of ceramic for all optical connecting adapters intended for single-mode fiber. All adapters are equipped with plugs for protection against dirt and dust.

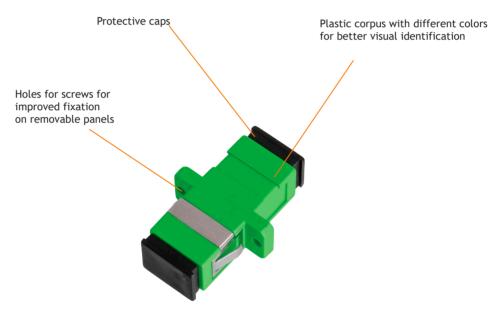

NMF-OA1S2-FN-SCA-SCA-GN-100

Package	Content
Optical fibe	r adapter

The manufacturer reserves the right to change the appearance and characteristics of the product, without reducing its consumer properties

NIKOMAX Optical Fiber Adapters



Specification

Part number	NMF-OA1S2-FN-SCA-SCA-GN-100			
Fiber type	Single Mode 9/125 OS2			
Adapter type	SC			
Polishing	APC			
Execution	Simplex			
Corpus material	Plastic			
Color	Green			
Central bushing material	Ceramics			
Insertion loss, dB	≤0.2			
Return loss, dB	≥60			
Number of switching cycles	No less than 1000			
Temperature ranges	Laying -40 to +85 ° C. Operation -40 to +85 ° C			
Individual packing	Plastic bag			
Warranty	1 year			

Ordering Table

PN	Execution	Adapter type / Polishing	Fiber type	Individual packing	
		Adapter type / Folishing		Volume, m3	Weight, kg
NMF-OA1S2-FN-SCA-SCA-GN-100	Simplex	SC/APC - SC/APC	SM OS2	0.00008	0.008

The manufacturer reserves the right to change the appearance and characteristics of the product, without reducing its consumer properties