

## NMR-XX60XX-G-GY

NIKOMAX 19" wall-mounted cabinet,  
glass door, metal walls,  
2 pairs of rails, assembled,  
grey RAL7035


- ✓ Supplied assembled
- ✓ Removable side walls
- ✓ Unit marking

The wall-mounted single-section cabinet NMR-series (hereafter is a cabinet) is designed to accommodate active and passive telecommunication equipment in the office and engineering and utility services rooms. In accordance with IEC 297-1, the cabinet is recommended for mounting 19-inch (19") equipment on vertical rails. Rails perforation is that of DIN 41494-7 and the requirements of GOST R 53246-2008.

The cabinet is made in the system of supporting structures 482.6 mm-series as per GOST 28601.2-90 (19-inch standard IEC 297-2). The cabinet complies with 4.2 climatic category as per GOST Standart 15150-69. It is intended to be used in enclosed rooms at temperatures from +1 to +40 °C and environmental relative importance up to 80 percent at +25 °C. The basic protection degree as per GOST 14254-96 (IEC 529-89) is IP30.



### STANDART CONFIGURATION

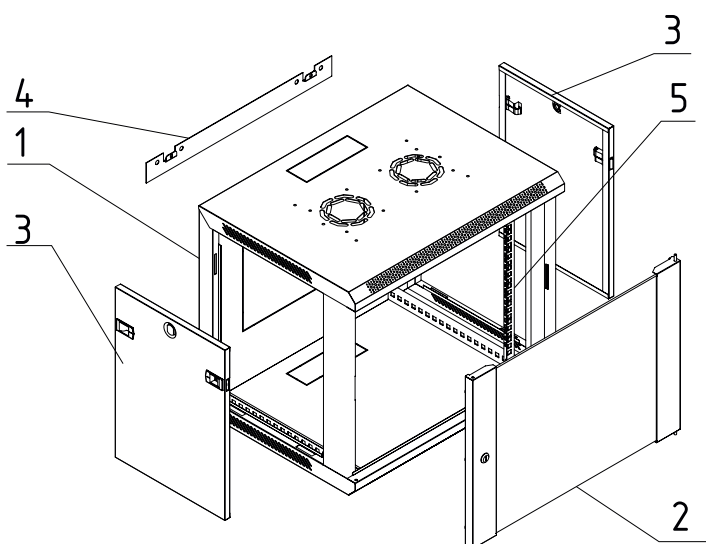

Accessories		
No	Item	Quantity, pcs.
1	Frame	1
2	Front door	1
3	Side walls	2
4	Panel for wall mounting	1
5	19" rails	4

### Specifications

Cabinet type	wall mounting		
Width, mm	600		
Color	grey RAL 7035		
Peak load, kg	60		
Protection class	IP30		
Door type	glass with lock handle		
Additional fastener assembly	10 pcs		
Side panels	full steel		
Cable entry	2 pcs (ceiling and floor)		
Frame thickness, mm	0.8		
Rail thickness, mm	1.2		
Door thickness (steel), mm	0.8		
Glass thickness, mm	5.0		
Side walls thickness, mm	0.8		
Foundation thickness, mm	0.8		
Roof thickness, mm	0.8		
Operating temperature range, °C	from +1 to +40		
Adjustment step 19" rails, mm	20		
Number of fans installed, pcs	2		
Height, U	6	9	12
Clearance height, mm	375	509	643
For cabinet depth of 450 mm			
Order Code	NMR-066045-G-GY	NMR-096045-G-GY	NMR-126045-G-GY
Weight, kg	14	17	20
Useful depth, mm	275		
Maximum distance between 19" rails, mm	420		
For cabinet depth of 600 mm			
Order Code	NMR-096060-G-GY	NMR-126060-G-GY	X
Weight, kg	21	23	X
Useful depth, mm	425		
Maximum distance between 19" rails, mm	570		


### RELATED PRODUCTS

Part number	Name
MNR-FAN1-BK	Fan unit NMR-series wall-mounted cabinets, 1 fan, W120xD120xH42mm, voltage 220V, 50-60Hz, fasteners and protective grill in set, black
NMR-SHFS-W45-GY	Fixed shelf NMR-series wall-mounted cabinets with a depth of 450mm, thickness 1.2mm, W490xD250xH48mm, grey RAL7035
NMR-SHFS-W60-GY	Fixed shelf NMR-series wall-mounted cabinets with a depth of 600mm, thickness 1.2mm, W490xD350xH48mm, grey RAL7035
NMR-BRSH-W-BK	Brush cable entry NMR-series wall-mounted cabinets, black

### ORDER TABLE

Part number	Height, U	Width, mm	Depth, mm	Height, mm	Package Size H×W×D, mm	Container size, m³	Weighting, kg
NMR-066045-G-GY	6	600	450	375	410×620×480	0.13	14.6
NMR-096045-G-GY	9	600	450	509	540×620×480	0.16	17.5
NMR-126045-G-GY	12	600	450	643	680×620×480	0.20	20.6
NMR-096060-G-GY	9	600	600	509	540×620×620	0.21	21.5
NMR-126060-G-GY	12	600	600	643	680×620×620	0.26	24.8

### DIMENSIONAL DRAWING

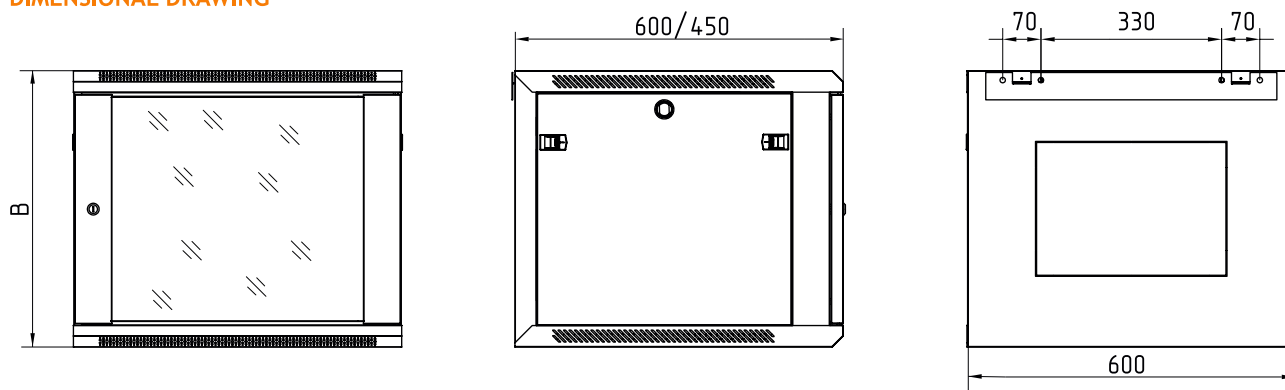

The manufacturer reserves the right to change the appearance and characteristics of the product, without reducing its consumer properties