

NMR-XX60XX-GMMM-GY

NIKOMAX 19" floor cabinet, glass door,
all-metal walls, disassembled, grey RAL7035

- ✓ Adjustable legs and casters included
- ✓ Removable side walls
- ✓ Unit marking


The floor telecommunication cabinet of the NMR series is designed to accommodate active and passive telecommunication equipment inside office and technical rooms.

The cabinet is recommended for mounting standard 19-inch (19 ") equipment, in accordance with IEC 297-1, on vertical mounting rails. The perforation of the guides complies with DIN 41494-7 and the requirements of GOST R 53246-2008.

The cabinet is made in the climatic modification of UHL category 4.2 according to GOST 15150-69 and is designed for operation in closed rooms at an ambient temperature of + 1 °C to + 40 °C and a relative humidity of ambient air up to 80% at 25 °C. The basic degree of protection according to GOST 14254-96 (IEC 529-89) is IP20.



BASIC COMPLETE SET

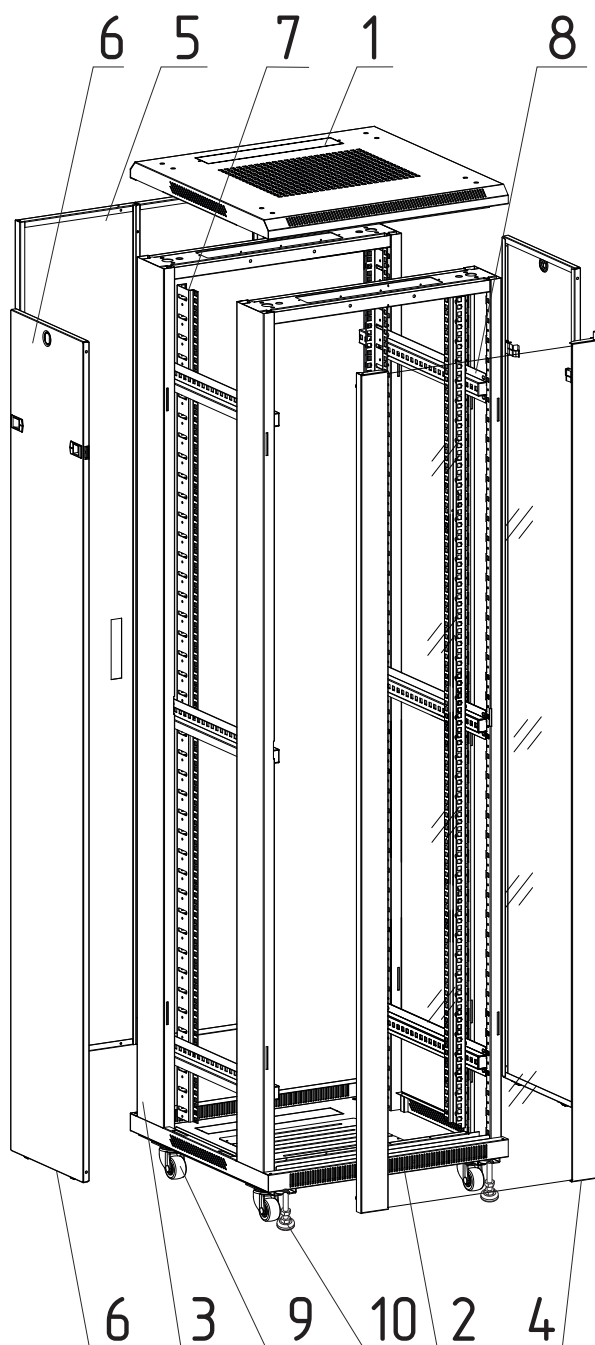

The cabinet is collapsible, with a number of heights 18, 24, 26, 42U and a depth of 600 and 800 mm.

Welded frame frames - provide high mechanical strength of the cabinet.

Removable single-leaf metal (metal with glass) doors with an opening angle of 220 degrees provide easy access to the cabinet from four sides for installation and maintenance of equipment. Fixing the door and side walls is carried out with the help of point locks. At the same time, the side walls are additionally equipped with quick lock latches.

To install the equipment in the cabinet, there are two pairs of 19 "rails with the possibility of depth adjustment. Digital marking of the unit (U) perforation of the 19" rails creates additional convenience for equipment placement.

Three brush inputs and five removable plugs - provide easy cable entry into the cabinet

Accessories are provided to enable:

- Placement of the cabinet on the floor on adjustable legs.
- Moving the cabinet on the floor on the roller bearings.

Accessories are included in the basic package.

Accessories		
№	Name	Quantity, pcs.
1	Roof	1
2	Plinth	1
3	Frame	2
4	Front door	1
5	Back door	1
6	Side wall	2
7	Mounting rail 19"	4
8	Transverse frame	18U 4
		24U 4
		26U 4
		42U 6
9	Castor without brake	4
10	Adjustable legs	4

RELATED PRODUCTS

Part number	Name
NMR-FAN2-600-GY	NIKOMAX fan unit for NMR series floor-standing cabinets with a depth of 600mm, 2 fans, W450xD363xH40mm, voltage 220V, 50-60Hz, C14 power input, grey RAL7035
NMR-FAN4-800-GY	NIKOMAX fan unit for NMR series floor-standing cabinets with a depth of 800mm, 4 fans, W450xD563xH40mm, voltage 220V, 50-60Hz, C14 power input, grey RAL7035
NMR-SHFS-F60-GY	NIKOMAX fixed shelf for NMR series floor-standing cabinets with a depth of 600mm, thickness 1.2mm, W471xD350xH48mm, grey RAL7035
NMR-SHFS-F80-GY	NIKOMAX fixed shelf for NMR series floor-standing cabinets with a depth of 800mm, thickness 1.2mm, W471xD550xH48mm, grey RAL7035
NMR-BRSH-F-BK	NIKOMAX brushed cable input plate for NMR series floor-standing cabinets, grey RAL7035

Specification

Cabinet type	floor mounting		
Width, mm	600		
Color	grey RAL 7035		
Maximum load, kg	800		
Protection class	IP20		
Front door type	glass with lock handle		
Back door type	Full steel with lock handle		
Interchangeable doors	yes		
Assembly kit	20 pcs		
Side panels	Full steel dismantled on latches with a lock assembly option		
Locking the side walls	sliding latches 2 pcs		
Frame thickness, mm	1.2		
Mounting rail thickness, mm	1.5		
Door thickness (steel), mm	1.2		
Glass thickness, mm	5.0		
Side panel thickness, mm	1.2		
Base thickness, mm	1.2		
Cover thickness, mm	1.2		
Temperature ranges, °C	от +1 до +40		
Adjustment step 19" mounting rails, mm	20		
For cabinet depth D=600 mm			
Part number	NMR-186060-GMMM-GY	NMR-426060-GMMM-GY	X
Height, U	18	42	X
Height, mm	988	2055	X
Net weight, kg	51	89	X
Compatible fan unit	NMR-FAN2-600-GY		
Useful depth, mm	510		
Max distance between 19" mounting rails, mm	500		
The number of cable entries in the roof, pcs	1		
Number of cable entries in the base, pcs	7		
For cabinet depth D=800 mm			
Part number	NMR-246080-GMMM-GY	NMR-266080-GMMM-GY	NMR-426080-GMMM-GY
Height, U	24	26	42
Height, mm	1255	1344	2055
Net weight, kg	72	74	105
Compatible fan unit	NMR-FAN4-800-GY		
Useful depth, mm	710		
Max distance between 19" mounting rails, mm	700		
The number of cable entries in the roof, pcs	4		
Number of cable entries in the base, pcs	7		

ORDER TABLE

Part number	Height, U	Width, mm	Depth, mm	Height, mm	Dimensions of cartons H×W×D, mm	Packing volume, m³	Weight of cartons, kg
NMR-186060-GMMM-GY	18	600	600	988	640×670×170	0.07	17.4
					900×640×100	0.06	25.0
					920×610×260	0.15	12.2
NMR-426060-GMMM-GY	42	600	600	2055	640×670×170	0.07	17.4
					1960×640×100	0.13	54.3
					1980×610×260	0.31	21.5
NMR-246080-GMMM-GY	24	600	800	1255	640×880×160	0.09	21.6
					1170×640×100	0.10	37.4
					1180×610×260	0.21	14.6
NMR-266080-GMMM-GY	26	600	800	1344	640×880×170	0.09	22.5
					1300×640×100	0.11	38.5
					1310×620×260	0.22	16.3
NMR-426080-GMMM-GY	42	600	800	2055	640×880×170	0.09	23.4
					1960×640×100	0.13	63.6
					1980×610×260	0.31	21.4

DIMENSIONAL DRAWING

