NMC-RP24-BLANK-AG-1U-MT

NIKOMAX snap-in patch panel 19", 1U, Angled, 24 ports for Keystone, UTP/STP, with grounding wire and cable organizer
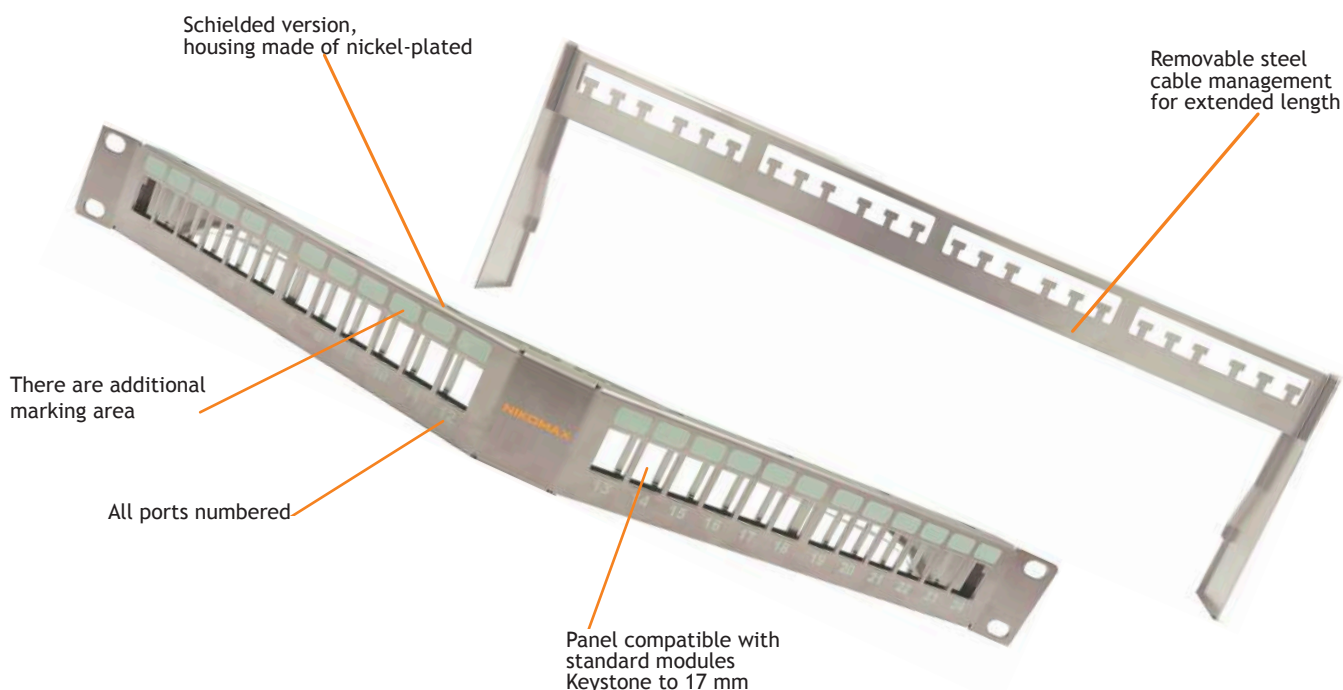
✓ Flexible modular solution

✓ Shielded performance

✓ Angled design

Angled snap-in patch panels are designed for connecting different SCS subsystems and network equipment to each other with patch cords.

NIKOMAX **NMC-RP24-BLANK-AG-1U-MT** with the angled design that allows for the smooth routing of cables to vertical cable troughs, eliminating the need for additional front cable management. And the modular design is extremely easy to install and allows the flexibility to combine different types of connectors and categories on a single frame. If required, the jack can easily be removed and rearranged to another port or panel. All ports of panel are numbered and have additional labeling area.

The patch panel is made of 1.5 mm steel and is suitable for both shielded and unshielded jacks. For better shielding against electromagnetic interference and improve communication with unpainted rails cabinet, galvanized steel panels coated with nickel.

Patch panel offer convenient detachable organizers for routing incoming cables.

Schielded version, housing made of nickel-plated

Removable steel cable management for extended length

There are additional marking area

All ports numbered

Panel compatible with standard modules Keystone to 17 mm

NMC-RP24-BLANK-AG-1U-MT

Basic equipment	
Patch panel	1 pc.
Cable organizer	1 pc.
Installation instructions	1 pc.
Screed Kit	24 pcs.
Screw Washer Nut	4 pcs.
Ground wire	1 pc.

The manufacturer reserves the right to change the appearance and characteristics of the product, without reducing its consumer properties.
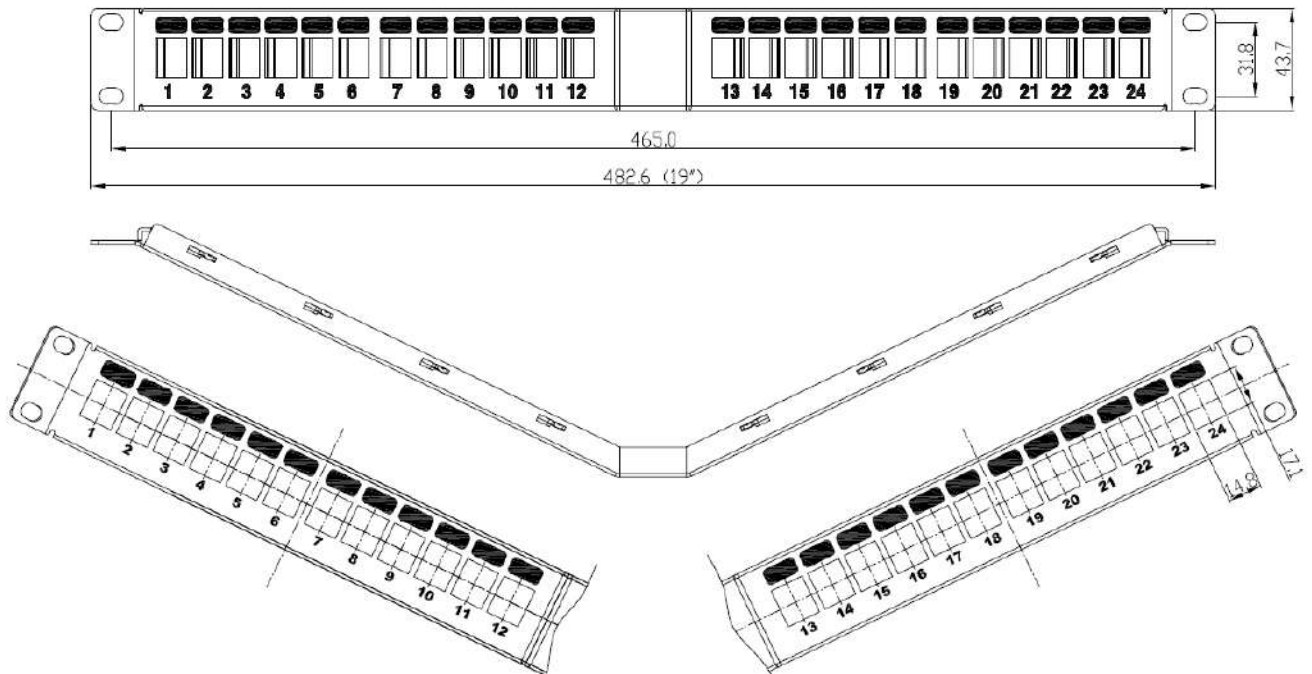
Specifications

Part number	NMC-RP24-BLANK-AG-1U-MT
Type	Shielded
Number of ports	24
Type of keystone to be installed	Keystone
Marking	All ports are numbered, there are additional labeling area
Installation	19" Cabinet or rack
Height	1U (44.5 mm)
Depth (with organizer)	150 mm
Housing Material	Nickel-plater steel, 1.5 mm
Color	Matellic (Nickel)
Temperature Ranges	Storage -40 to +70 ° C. Installation 0 to +50 ° C. Operating -10 to +60 ° C
Packaging	Individual - cardboard box
Package Dimensions (Box, LxWxH)	506 x 146 x 72 mm
Warranty	1 year

Ordering Table

Part Number	Type	ports	Height, U (mm)	Individual packing		Freight package		
				Dimensions,mm	Weight,kg	Qty	Dimensions, mm	Weight,kg
NMC-RP24-BLANK-AG-1U-MT	Shielded	24	1 (44.5)	506x146x72	0.99	15 pcs.	520x395x320	11.05

DIMENSION DRAWING