


# Patch Panels

## Unshielded Cassette Module

Cassette modules are designed exclusively for installation in NIKOMAX NMC-RP08-BLANK-CJ-1U-MT cassette patch panel.

**NIKOMAX NMC-CJ06UE2-1S-GY (Cat.6)** is made of durable, high quality plastic and can accommodate 6 port RJ45 / 8P8C. Universal IDC contacts for 110 / KRONE knives are located within the cassette . There are two wiremap standards: T568 A and B.

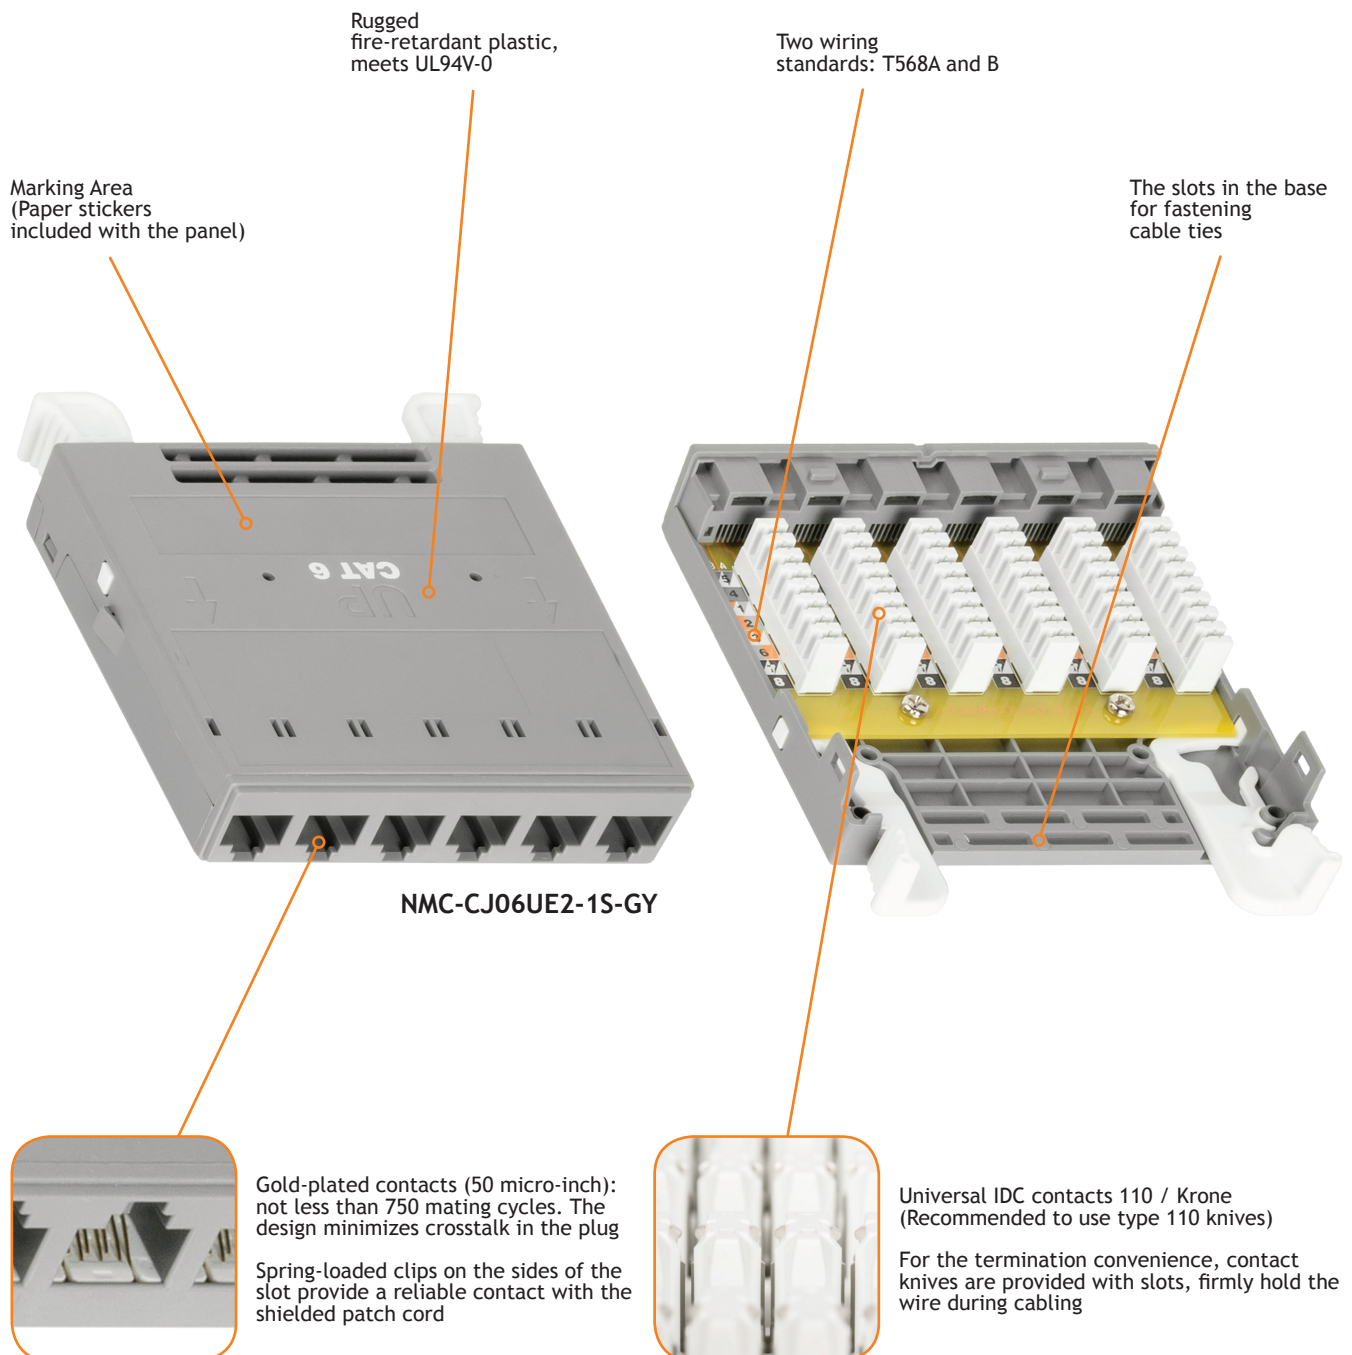

### Accessories

Punch  
Down  
Tool:  
NMC-3640RB

Cable  
Cutter:  
NMC-502C  
NMC-222

Cable  
Stripper:  
NMC-S501C

The manufacturer reserves the right to alter the appearance and characteristics of the product, without compromising the product's functionality

# Patch Panels

## Unshielded Cassette Module

### Specifications

	<b>NMC-CJ06UE2-1S-GY</b>
Category	6
Bandwidth	250 MHz
Type	Unshielded
Number of Ports	6
Connector	RJ45/8P8C
Conductor Material	Phosphor bronze
Plating	Gold (50 micro-inch)
Durability (mating cycles)	Not less than 750
IDC Type	110/KRONE
Wiremap	T568A/B
Conductor Diameter	~24-22 AWG (0.50-0.65 mm)
IDC Connector Material	Phosphor bronze
Plating	Tin (100 micro-inch)
Marking	Labels (supplied with the panel)
Installation	NIKOMAX series CO Cassette panel
Housing Material	Fireproof ABS plastic, meets UL94V-0
Color	Gray
Insulation Resistance ( $\Omega$ )	Not less than 500 M(at constant voltage of 100 V)
Dielectric Withstand Voltage	Up to 1000 V, 60 Hz for 1 minute
Contact Resistance ( $\mu\Omega$ )	Not more than 20
IDC Contact Resistance ( $\mu\Omega$ )	Not more than 2.5
Compliance	ISO / IEC 11801, EN 50173 and ANSI/TIA-568-C.2
Applications	10BASE-T, 100BASE-TX, 100BASE-T4, 1000BASE-T, 10G-BASE-T(55M for Cat. 6), ATM-25, ATM-51, ATM-155, 100VG-AnyLan, TR-4, TR-16 Active, TR-16 Passive
Temperature Ranges	Storage -40 to +70 ° C. Installation 0 to +50 ° C. Operating -10 to +60 ° C
Packaging	Cardboard box
Warranty	5 years - extended; 25 years - as part of the NIKOMAX SCS certified

### Ordering Table

Part Number	Category	Ports	Individual package		Freight package		
			Dimensions, mm	Weight, kg	Quantity	Dimensions, mm	Weight, kg
NMC-CJ06SA2-1S-MT	6 <sub>A</sub>	6	125x100x23	0.325	48 pcs.	515x375x240	16.9
NMC-CJ06SE2-1S-MT	6	6	125x100x23	0.325	48 pcs.	515x375x240	16.9

### Package Content

Cassette with a lid - 1 pc.  
Installation instruction - 1 pc.