

NIKOMAX NMC-315DR is designed for simultaneous sealing of several pairs of wires in the 110 type terminal blocks. The tool is a mechanical device designed for the mechanical fixation of live wires in the terminals or cross-connect block connector.

The tool is equipped with removable and interchangeable nozzles with impact mechanism. On nozzles are knives for trimming excess lengths of wires after their fixation pins. Inserting the knives can be set in the working position or removed with knives inside: easy to fix cables, with trimming.

NMC-315DR is packed with 5 pairs intended for terminating multi-pair cables in the 110 type terminal blocks. To seal four pair is more convenient to use with NMC-TA15B nozzle (sold separately). This piece does not crashed into neighboring IDC contacts, help extending their lives, which is especially important for patch panels.



Table of compatible components - Patch Panels

Product Number	Type	Installation	Number of ports	Category
NMC-RP24UE2-1U-BK	Patch panel, UTP	19", 1U	24	Cat.6
NMC-RP24UD2-1U-BK	Patch panel, UTP	19", 1U	24	Cat.5e
NMC-RP48UE2-2U-BK	Patch panel, UTP	19", 2U	48	Cat.6
NMC-RP48UD2-2U-BK	Patch panel, UTP	19", 2U	48	Cat.5e
NMC-WP06UE2-GY	Patch panel, UTP	Wall	6	Cat.6
NMC-WP06UD2-GY	Patch panel, UTP	Wall	6	Cat.5e

### Table of compatible components - such as 110 type & KRONE type

Part Number	Type	Installation	Number of pairs
NMC-RB110-100	Patch panel 110	19", 1U	100
NMC-RB110-200	Patch panel 110	19", 1U	200
NMC-CB110-50L	Patch panel 110	Wall, with legs	50
NMC-CB110-100L	Patch panel 110	Wall, with legs	100
NMC-CB110-50NL	Patch panel 110	Wall, without legs	50
NMC-CB110-100NL	Patch panel 110	Wall, without legs	100
NMC-CC110UD4-100	Connector 110	Blocks and panels 110	4
NMC-CC110UD5-100	Connector 110	Blocks and panels 110	5

### Package Content


**NMC-315DR:**  
Tool - 1 piece.  
Nozzle 5 pairs - 1 pc.

**NMC-TA15B:**  
Attachment 4 pairs - 1 pc.

### Accessories

Cable Stripper:  
NMC-S501B

Cable Cutter:  
NMC-535  
NMC-502C

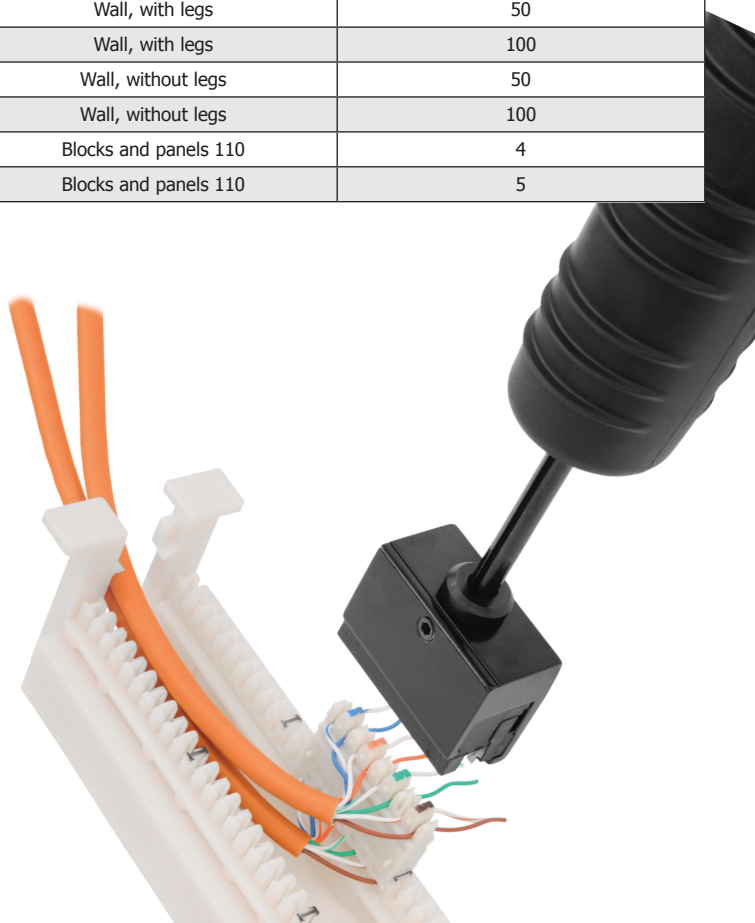

### Specification

	<b>NMC-315DR</b>
Housing material	High-strength magnesium-aluminum alloy (AL 6061-T6)
Material of handle cover	Anti-Slip thermoplastic (TPR)
Color	Black
Punching mechanism	Yes
Temperature range, ° C	Storage -20 to +70°C. Operating from -10 to +50°C
Warranty	1 Year
Packaging	Individual - Blister pack
Additional features	Nozzle for simultaneous sealing and cutting 5 pairs included

### Ordering Table

Product Number	Individual package		Collective package			Freight package		
	Dimensions, mm	Weight, kg	Quantity	Dimensions, mm	Weight, kg	Quantity	Dimensions, mm	Weight, kg
NMC-315DR	205x140x24	0.465	9 pcs.	300x205x150	4.25	36 pcs.	420x320x325	18.5
NMC-TA15B	35x25x25	0.052	30 pcs.	220x200x100	2.38	180 pcs.	405x235x240	10.5

To maintain the high quality of the installation, it is recommended to replace workers with new nozzle after each thousand embedded connections.